


SWIMER WATER TANK are approved for drinking water*

of the National Institute of Public Health - National Institute of Hygiene (Poland)







Above-ground tanks for drinking water

SWIMER POTABLE WATER TANK

Slim-Line, Eco-Line, Comfort-Line



SWIMER POTABLE WATER TANK

Above-ground tanks

Polyethylene potable water tanks are a key component of water infrastructure, ensuring the supply of clean water to communities. Therefore, it is important that these tanks meet the highest quality standards. One such standard is the PZH Certificate (applicable in Poland), which confirms that the tank is safe for health and meets the requirements for drinking water quality.

SWIMER's product offer includes above-ground tanks for the storage of potable water with capacities ranging from 1 m³ to 22 m³. Above-ground tanks are particularly suitable for use inside buildings, and underground tanks are used outside buildings where it is not possible to install a tank indoors. Tanks for drinking water should be placed in shaded areas not exposed to intense sunlight.





SERIE **SWIMER POTABLE WATER TANK** Slim-Line | SLJP



Color* NATURAL/TRANSPARENT:



*Also inquire about custom graphic personalization of your water tank!



TECHNICAL DATA

VERSION	CAPACITY	DIMENSIONS (H x W x L)	POWER SUPPLY	POWER	CATALOG NO.
Basic	3000 L	2250 x 950 x 1850 mm			SW-107332114
	5000 L	2250 x 950 x 3050 mm	-	-	SW-100432114

TRANSPORT

3000 L ¹⁾	5000 L ¹⁾
13 pcs.	8 pcs.

¹) semi-trailer:

width 2.45 x height 2.85 x length 13.60 m $\,$

EQUIPMENT

BASIC





pection natch





2" inlet with 2" bottom drain male thread with brass ball valve terminated with

female thread

WARRANTY

Tank leakproof: 5 years Accessories: 24 months



OPTIONAL EQUIPMENT





2" inlet with STORZ type connector



2" bottom drain with ball valve and STORZ type connector







SWIMER POTABLE WATER TANK

SLJP

capacity:

3000

serie:

Slim-Line



SWIMER POTABLE WATER TANK

SLJP

capacity:

5000

serie:

Slim-Line





SERIE SWIMER POTABLE WATER TANK Eco-Line | ELJP



Color* NATURAL/TRANSPARENT:



*Also inquire about custom graphic personalization of your water tank!

TECHNICAL DATA

VERSION	CAPACITY	DIMENSIONS (H x W/Φ)	FILLING POINT HEIGHT	POWER SUPPLY	POWER	CATALOG NO.
Basic	1000 L	1300 x 1100 mm	150 cm			SW-1071111
	1500 L	1600 x 1250 mm	150 cm		-	SW-1001111
	2000 L	1450 x 1400 mm	165 cm	-		SW-1072111
	2500 L	1700 x 1550 mm	150 cm			SW-1002111
	5000 L	1700 x 2200 mm	150 cm			SW-1004111

TRANSPORT

1000 L¹)	1500 L ¹⁾	2000 L ¹⁾	2500 L ¹⁾	5000 L ¹⁾
22 pcs.	22 pcs.	14 pcs.	10 pcs.	6 pcs.

 $^{^{1)}}$ semi-trailer: width 2.45 x height 2.85 x length 13.60 m

WARRANTY

Tank leakproof: 5 years Accessories: 24 months

EQUIPMENT

BASIC





hatch Ø 440 mm







2" inlet with 2" bottom drain with brass ball valve terminated with







SONIC PRO



gauge







Ask our export sales representative about customizing additional equipment

+48 533 999 026

export@swimer.pl

You can contact us in: English, French, German, Spanish, Russian and Polish



SWIMER POTABLE WATER TANK

ELJP

capacity:

1000

serie:

Eco-Line







SWIMER POTABLE WATER TANK

ELJP

capacity:

2000

serie:

Eco-Line



ELJP

capacity:

1500

serie:

Eco-Line







SWIMER POTABLE WATER TANK

ELJP

capacity:

2500

serie

Eco-Line




SWIMER POTABLE WATER TANK

ELJP

capacity: **5000**

Eco-Line



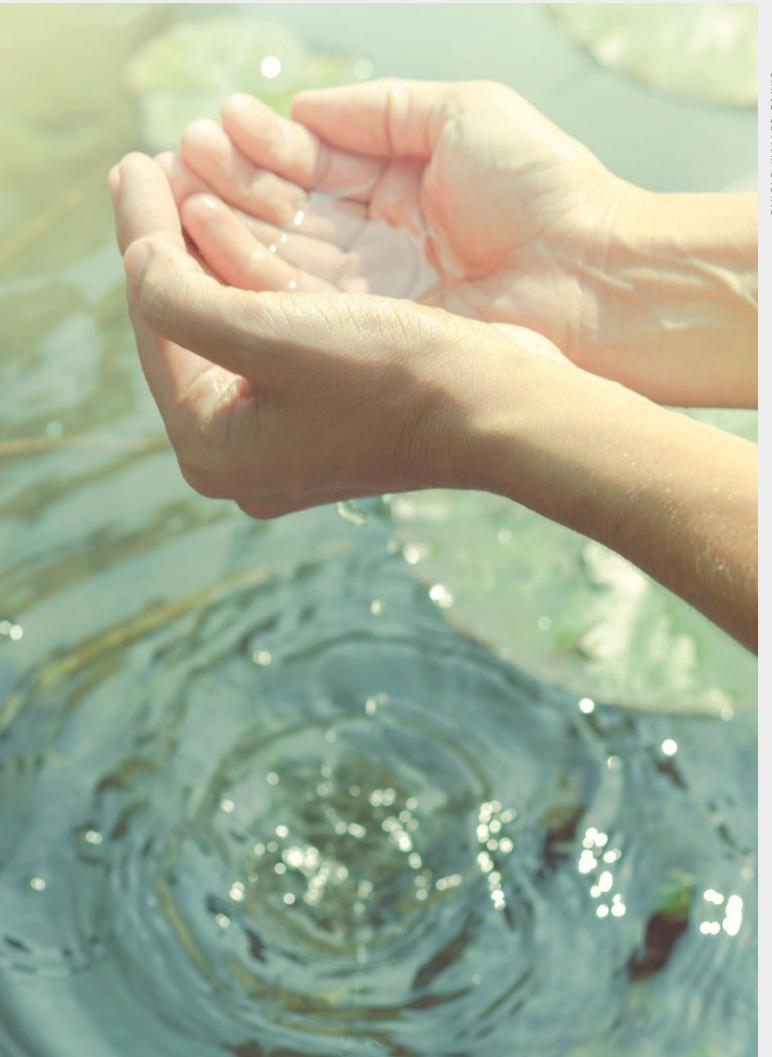



SERIE SWIMER POTABLE WATER TANK Comfort-Line | FUJP



TECHNICAL DATA

VERSION	CAPACITY	DIMENSIONS (H x W/ Φ x L)	POWER SUPPLY	POWER	FILLING POINT HEIGHT	CATALOG NO.
	2500 L	1650 x 1400 x 1900 mm			160 cm	SW-1002311
	3500 L	1700 x 1800 mm			160 cm	SW-1003311
	5000 L	1800 x 2150 mm			170 cm	SW-1004311
	7500 L	2100 x 2350 mm			207 cm	SW-1005311
Basic	10000 L	2500 x 2450 mm	-	-	240 cm	SW-1006311
	12500 L	3050 x 2450 mm			290 cm	SW-1007311
	15000 L	3300 x 2550 mm			320 cm	SW-10133111
	20000 L	3250 x 3000 mm			315 cm	SW-1010311
	22000 L	2800 x 3400 mm			270 cm	SW-1078311

TRANSPORT

2500 L ¹⁾	3500 L ¹⁾	5000 L ¹⁾	7500 L ¹⁾	10000 L ¹⁾	12500 L ²⁾	15000 L ³⁾	20000 L ³⁾	22000 L ³⁾
9 pcs.	8 pcs.	6 pcs.	5 pcs.	5 pcs.	5 pcs.	5 pcs.	4 pcs.	4 pcs.

 $^{^{\}mbox{\tiny 1)}}$ semi-trailer: width 2.45 x height 2.85 x length 13.60 m

WARRANTY

TANKS 2500-12500

Tank leakproof: 5 years

Accessories: 24 months

TANKS 15000-22000 Tank leakproof: 10 years Accessories: 24 months

²⁾ PLATFORM

 $^{^{\}scriptscriptstyle{(3)}}\,\mbox{PLATFORM}$ - oversized transport

EQUIPMENT

BASIC











2" inlet with male thread

2" bottom drain with brass ball valve terminated with female thread

- ¹⁾ Ø 440 mm for capacities: 2500, 3500, 20000 L
- Ø 500 mm for capacities: 10000, 12500 i 15000 L
- \emptyset 640 mm for capacities: 5000 i 7500 L
- \emptyset 704 mm for capacities: 10000, 12500, 15000, 20000 i 22000 L

Tanks with capacities of 10000, 12500, 15000 and 20000 L have two inspection hatches - an additional hatch allows freer access to the tank.

OPTIONAL EQUIPMENT





LIPREMOS®

SONIC

PRO



gauge





2" inlet with STORZ type connector

2" bottom drain with ball valve and STORZ type connector

SWIMER WATER TANK are approved for drinking water*

of the National Institute of Public Health - National Institute of Hygiene (Poland)



*Applies to tanks sold in Poland. For validation of the certificate for other markets, please contact the SWIMER export department: e-mail: export@swimer.pl, hotline: +48 533 999 026





FUJP

capacity:

2500

serie:

Comfort-Line







SWIMER POTABLE WATER TANK

FUJP

capacity:

3500

serie:

Comfort-Line



SWIMER POTABLE WATER TANK

FUJP

capacity:

5000

serie

Comfort-Line





FUJP

capacity:

7500

serie:

Comfort-Line







SWIMER POTABLE WATER TANK

FUJP

capacity:

10000

serie:

Comfort-Line



SWIMER POTABLE WATER TANK

FUJP

capacity:

12500

serie

Comfort-Line





FUJP

capacity:







SWIMER POTABLE WATER TANK

FUJP

capacity:

20000

Comfort-Line





SWIMER POTABLE WATER TANK

FUJP

capacity:

22000

serie:

Comfort-Line





EQUIPMENT DESCRIPTION SWIMER POTABLE WATER TANK

Slim-Line | Eco-Line | Comfort-Line



BASIC

Inspection hatch (depends on the capacity and type of tank)

An inspection hatch in the inner tank allows:

- comfortable access to the inside of the tank
- easy tank cleaning



Vent:

- provides a permanent connection to the atmosphere
- prevents the formation of over- and under-pressure in the tank



2" inlet with male thread:

- made of acid-resistant steel
- strong, durable and stable connection



2" bottom drain with brass ball valve terminated with female thread:

- located at the bottom of the tank
- valve allows for safe and controlled spilling of water



OPTIONAL EQUIPMENT



LIPREMOS® SONIC PRO:

- precise measurement of fuel level and temperature
- $\bullet \;$ system for monitoring and analyzing tank stocks
- read data is sent to the application (web/mobile)



Clock gauge:

- shows the filling level of the tank
- has a robust ABS plastic housing, PE-HD float
- easy assembly / disassembly
- fits all tanks with 2" screw connection
- UV resistant



2" inlet with STORZ type connector:

- tight connection between the tanker and the tank being refuelled
- minimize the risk of leakage during tank filling



2" bottom drain with ball valve and STORZ type connector:

- located at the bottom of the tank
- valve allows for safe and controlled spilling of water

